


RHINOCEROS

XN800

MINI DUMPER

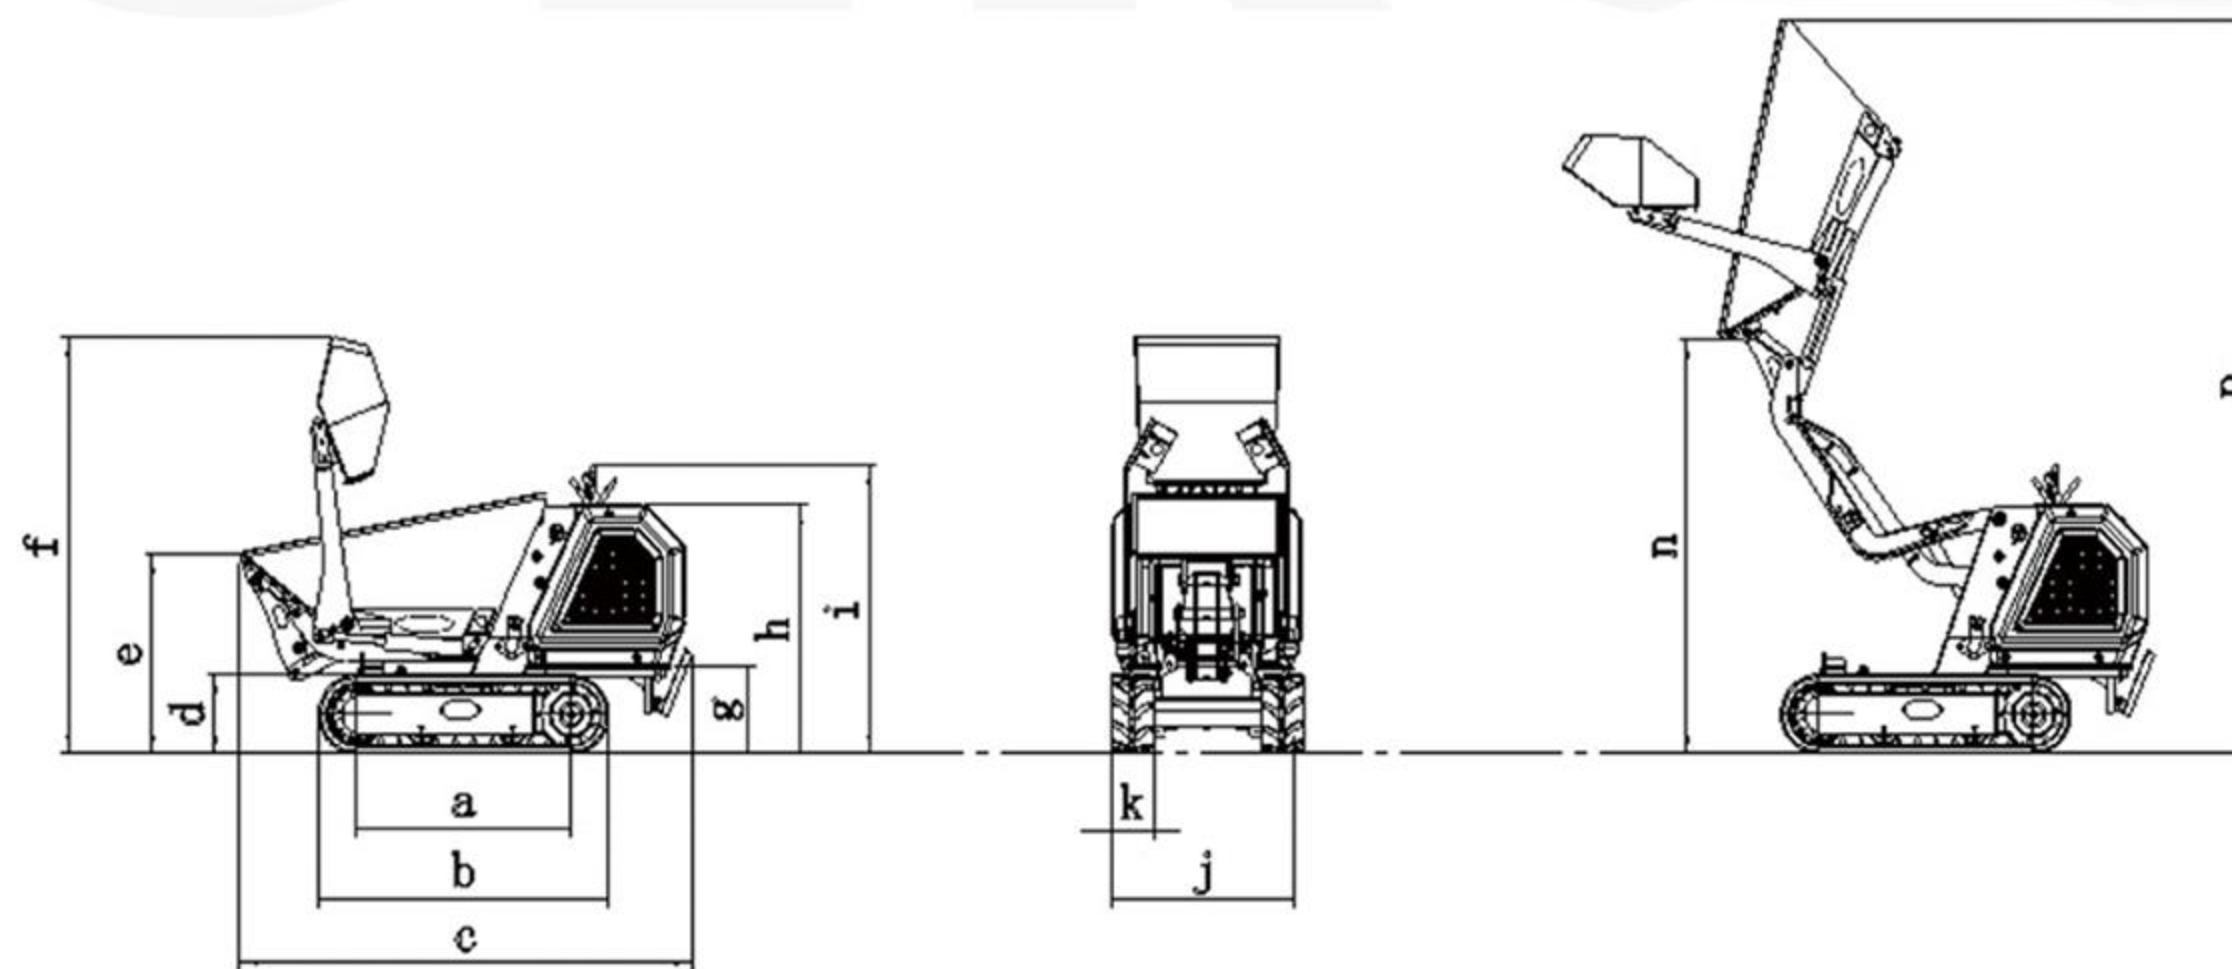

MAIN DIMENSION		
a	Track width	914mm
b	Track length	1230mm
c	Length	1795mm
d	Track height	320mm
e	Height of tip front end from ground	810mm
f	Height from self loading bucket to ground	1690mm
g	Platform off ground	355mm
h	Control console height above ground	1005mm
i	Height of tip back from ground	1060mm
j	Width	820mm
k	Track width	180mm
m	Tipping bucket width	620mm
n	Maximum dumping Height	1700mm
p	Maximum unloading tipper height	2980mm
XN800-Briggs&Stratton B420 SPECIFICATION		
Operating weight		820kg
Capacity of loading		800kg/1763.70lb
Bucket capacity		0.26 cbm
Working type		Self loading and unloading
Engine	Model No.	Briggs&Stratton25T2
	Displacement	0.420L
	Rated power/Rev	10 Kw/3600r/min
	Max.torque	26N.m/2860r/min
Speed	Max. speed	4km/h
	Min. speed	2km/h
	Max.grade ability	30%
	Ground pressure	21.21KPa
Track	Material	Rubber
	Tightening type	Screw adjustment
	Pump type	Gear duplex pump
Hydraulic system	Pressure	16MPa
	Flow	30L/min
Tank capacity	Hydraulic oil tank	14 L
	Fuel tank	6.6L

KUBOTA ENGINE SPECIFICATION		
Operating weight		920kg
Capacity of loading		800kg1763.70lb
Bucket capacity		0.26 cbm
Working type		Self loading and unloading
Engine	Model No.	Kubota D722
	Displacement	0.719L
	Rated power/Rev	10.2Kw/2500r/min
	Max. toque	42.9N.m/2000r/min
Speed	Max. speed	4 km/h
	Min. speed	2 km/h
	Max.grade ability	30%
	Ground pressure	26.13KPa
Track	Material	Rubber
	Tightening type	Screw adjustment
	Pump type	Gear duplex pump
Hydraulic system	Pressure	16MPa
	Flow	30L/min
Tank capacity	Hydraulic oil tank	14L
	Fuel tank	16L
KOOP ENGINE SPECIFICATION		
Operating weight		830kg
Capacity of loading		800kg
Bucket capacity		0.26 cbm
Working type		Self loading and unloading
Engine	Model No.	Koop192
	Displacement	0.499L
	Rated power/Rev	7 Kw/3000rpm
	Max. Torque	23.8N.m/3000rpm
Speed	Max. speed	4.2km/h
	Min. speed	2.1km/h
	Max.grade ability	30%
	Ground pressure	21.21KPa
Track	Material	Rubber
	Tightening type	Screw adjustment
	Pump type	Gear duplex pump
Hydraulic system	Pressure	16MPa
	Flow	30L/min
Tank capacity	Hydraulic oil tank	12.8 L
	Fuel tank	5.5L

www.rhinoexcavator.com



SHANDONG KEN STONE HEAVY MACHINERY CO.,LTD



Factory visit

Address : Dingyuanzhai Industrial Park,Guan County,Liaocheng city, Shandong Province, China
Postal code : 252512
Website : www.rhinoexcavator.com
E-mail : office@sdxinu.com

XN800

MINI DUMPER